


CENTRIFUGAL MONOBLOC PUMPS according to DIN 24255 standard in cast iron

Close-coupled Mono-bloc centrifugal pump in accordance to DIN 24255 pump performance. Applications include water boosting, cold and hot water systems, air-conditioning, washing systems and most industrial applications. Available in 2 versions, MDM in 2 Poles and MDM4 in 4 Poles.

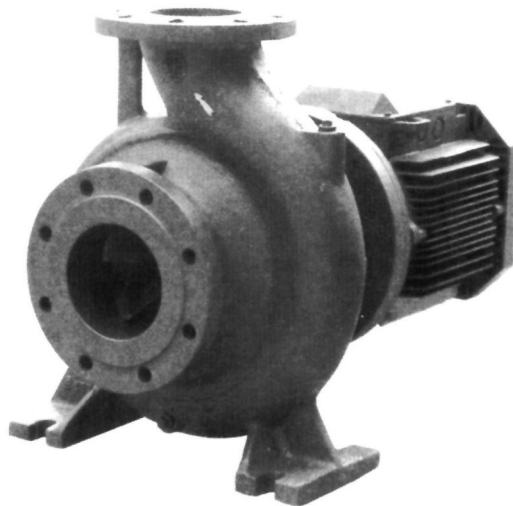

SPECIFICATIONS

- Maximum working pressure : 10 bar
- Maximum liquid temperature
 - Standard version : -10°C to +90°C
 - Special version : -20°C to +120°C
(optional, upon request)

MATERIALS

- Casing, impeller in GG-20
- Pump shaft: AISI 304
- Mechanical seal in carbon/ceramic/NBR

TECHNICAL DATA

- 2 poles motor
- IP55 protection, insulation Class F
- Suitable for continuous operations
- 230/400V \pm 10%, 50Hz up to 4kW
inclusive 400/690V \pm 10%, 50Hz

UP TO REQUEST: COUNTER FLANGES SET

- Scope of supply: counter flanges suction/discharge side, gasket and bolts.